

CDA-43

CAT-5 / UTP Multiple Input Video Distribution Amplifier



FEATURES:


- Four 1x3 Dist. in each unit
- UTP Ground Loop Blocking inputs
- High quality Color video performance
- Industrial grade specifications
 - Terminal Strip Inputs
- UL listed Power Supply
 - Made in the USA

The **CDA-43** has four high performance, 1x3 Color Video distribution Amplifiers with UPT Ground Loop Blocking inputs in one chassis. Instead of installing 4 separate UTP baluns, use the **CDA-43** to save space and money. The differential input amplifiers are used to minimize or eliminate ground loop problems. For 1x2 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the **CDA-43**.

SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs (4):	Composite Video	V Tilt:	<1%
Input Connectors:	BNC	Crosstalk Between CH:	>60dB @ 3.58mHz
Input Level:	1.0VPP Into 75 ohms	CCMR:	Typ. 60dB @ 4mHz
Input Impedance:	75ohm +/-5%	Power Requirements:	
Outputs (12):	3 Per Input	AC Operation:	Use CVT-1231 Adapter
Output Connectors:	BNC		Supplied With Unit
Output Impedance:	75ohm +/-5%	AC Power:	120VAC +10% / -15% / 60Hz
Gain In/Out:	+/- 2dB Depending On Cable Length.	AC Power Draw:	<2w
		Power Connector:	3.5mm Phono Plug
Diff Gain:	<1%	Mechanical:	
Diff. Phase:	<1°	Size:	8.00"W x 8.5"D x 1.65"H
Frequency Response:	0-15mHz +/- .5dB	Weight:	1.5lbs
Power / Supply Hum:	<63dB		

All Specifications Subject To Change Without Prior Notification

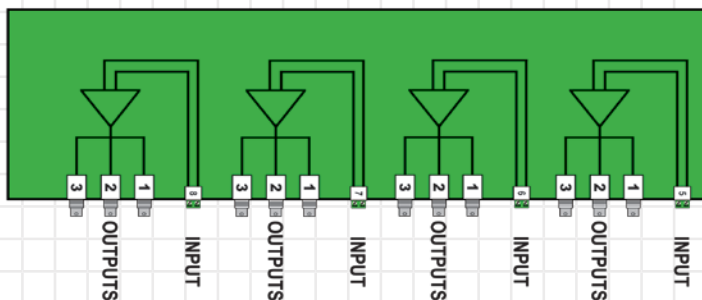

Phone: (845) 737-7009 • Fax: (845) 737-0426 • www.compuvideosystems.com