

DA-1200

Single Input Video Distribution Amplifier



FEATURES:


- Single 1x12 Distribution amp in each unit
- High quality Color video performance
- Industrial grade specifications
 - Compact size
- UL listed Power Supply
 - Made in the USA

The **DA-1200** is a high performance 1x12 Color Video distribution Amplifier in a compact chassis. Instead of installing multiple DA's, use the **DA-1200** to save space and money. For less than 1x12 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the **DA-1200**.

SPECIFICATIONS

| | | | |
|---------------------|-----------------------|----------------------------|-----------------------------------|
| Video: | | H Tilt: | <1% |
| Inputs (1): | Composite Video | V Tilt: | <1% |
| Input Connectors: | BNC | Crosstalk Between CH: | >60dB @ 3.58mHz |
| Input Level: | 1.0VPP Into 75 ohms | Power Requirements: | |
| Input Impedance: | 75ohm +/-5% | AC Operation: | Use CVT-1250 Adapter |
| Outputs (12): | 12 Per Input | | Supplied With Unit |
| Output Connectors: | BNC | AC Power: | 120VAC +10% / -15% / 60Hz |
| Output Impedance: | 75ohm +/-5% | AC Power Draw: | <2w |
| Gain In/Out: | Unity +/-3dB Variable | Power Connector: | 3.5mm Phono Plug |
| Diff Gain: | <1% | Mechanical: | |
| Diff. Phase: | <1° | Size: | 8.00"W x 8.5"D x 1.65"H |
| Frequency Response: | 0-15mHz +/- .5dB | Weight: | 1.5lbs |
| Power / Supply Hum: | <63dB | Operating Temp Range: | 0-40°C With Provided Power Supply |
| | | | -35-80°C Without Provided Power |
| | | | Supply |

All Specifications Subject To Change Without Prior Notification

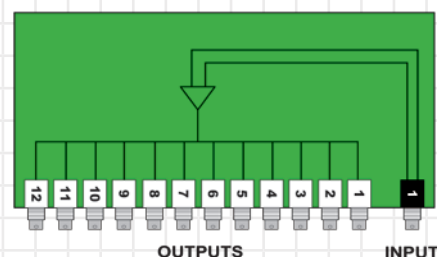

Phone: (845) 737-7009 • Fax: (845) 737-0426 • www.compuvideosystems.com