

DA-3400

Multiple Input Video Distribution Amplifier



FEATURES:


- Four 1x3 Distribution amps in each unit
- High quality Color video performance
- Industrial grade specifications
- Compact size
- UL listed Power Supply
- Made in the USA

The DA-3400 has four high performance, ground loop preventing, 1x3 Color Video distribution Amplifiers in one chassis. Instead of installing 4 separate DA's, use the DA-3400 to save space and money. For 1x2 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the DA-3400.

SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs (4):	Composite Video	V Tilt:	<1%
Input Connectors:	BNC	Crosstalk Between CH:	>60dB @ 3.58MHz
Input Level:	1.0VPP Into 75 ohms	Power Requirements:	
Input Impedance:	75ohm +/-5%	AC Operation:	Use CVT-1250 Adapter
Outputs (12):	3 Per Input		Supplied With Unit
Output Connectors:	BNC	AC Power:	120VAC +10% / -15% / 60Hz
Output Impedance:	75ohm +/-5%	AC Power Draw:	<2w
Gain In/Out:	Unity +/-3dB Variable	Power Connector:	3.5mm Phono Plug
Diff Gain:	<1%	Mechanical:	
Diff. Phase:	<1°	Size:	8.00"W x 8.5"D x 1.65"H
Frequency Response:	0-15mHz +/- .5dB	Weight:	1.5lbs
Power / Supply Hum:	<63dB	Operating Temp Range:	0-40°C With Provided Power Supply
			-35-80°C Without Provided Power
			Supply

All Specifications Subject To Change Without Prior Notification

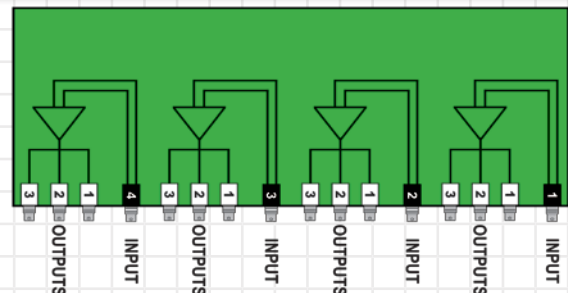

Phone: (845) 737-7009 • Fax: (845) 737-0426 • www.compuvideosystems.com